



# Wirewound Common Mode Chokes


## WCM 3225 Series 1210 inch



### Dimensions

#### Chip Size Units: mm




A	3.20±0.20
B	2.50±0.20
C	2.20±0.20
D1	0.80±0.10
D2	0.90±0.10



### Specifications

Part Number	Common mode Impedance ( $\Omega$ )	Test Frequency (MHz)	DC Resistance ( $\Omega$ ) max.	Rated Current (mA)max.	Rated Volt (Vdc)max.	Withstand Volt. (Vdc) max.	IR ( $\Omega$ ) min.
WCM3225F2SF-900T10	90 ± 25%	100	0.027	1000	50	125	10M
WCM3225F2SF-601T10	600 ± 25%	100	0.20	1000	50	125	10M
WCM3225F2SF-102T04	1000 ± 25%	100	0.30	400	50	125	10M

### Impedance-Frequency Characteristics (Typical)

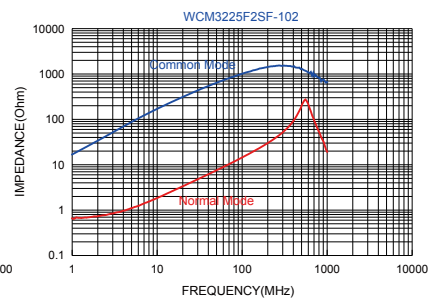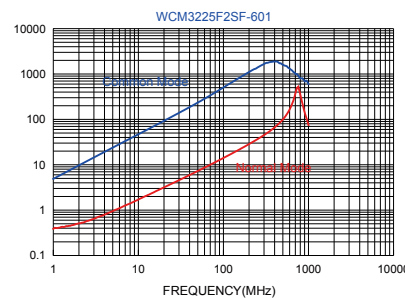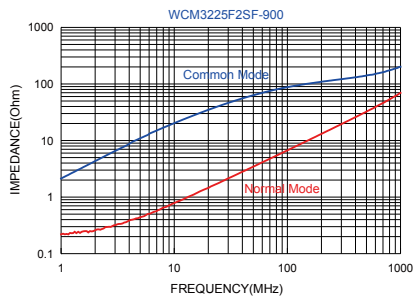

#### Remark

All the data listed in this catalogue are for reference only, TAI-TECH reserves the right to alter or revise the specifications without prior notification. For the latest specification, please visit our website: [www.taitech.com.hk](http://www.taitech.com.hk)