



High Current Ferrite Chip Beads

HCB 1608 Series 0603 inch




Dimensions

Chip Size

Units: mm


A	1.60±0.15	
B	0.80±0.15	
C	0.80±0.15	0.60±0.15
D	0.30±0.20	



Specifications

Part Number	Impedance (Ω)	Test Frequency (MHz)	DC Resistance (Ω) max.	Rated Current (mA) max.	Height (mm) max.
HCB1606ZF-260T60	26 ± 25%	100	0.01	6000	0.75
HCB1608KF-300T30	30 ± 25%	100	0.04	3000	0.95
HCB1608KF-800T30	80 ± 25%	100	0.04	3000	0.95
HCB1608KF-121T20	120 ± 25%	100	0.10	2000	0.95
HCB1608KF-151T20	150 ± 25%	100	0.10	2000	0.95
HCB1608KF-221T20	220 ± 25%	100	0.10	2000	0.95
HCB1608KF-301T10	300 ± 25%	100	0.20	1000	0.95
HCB1608KF-471T10	470 ± 25%	100	0.20	1000	0.95
HCB1608KF-601T10	600 ± 25%	100	0.20	1000	0.95

Impedance-Frequency Characteristics (Typical)

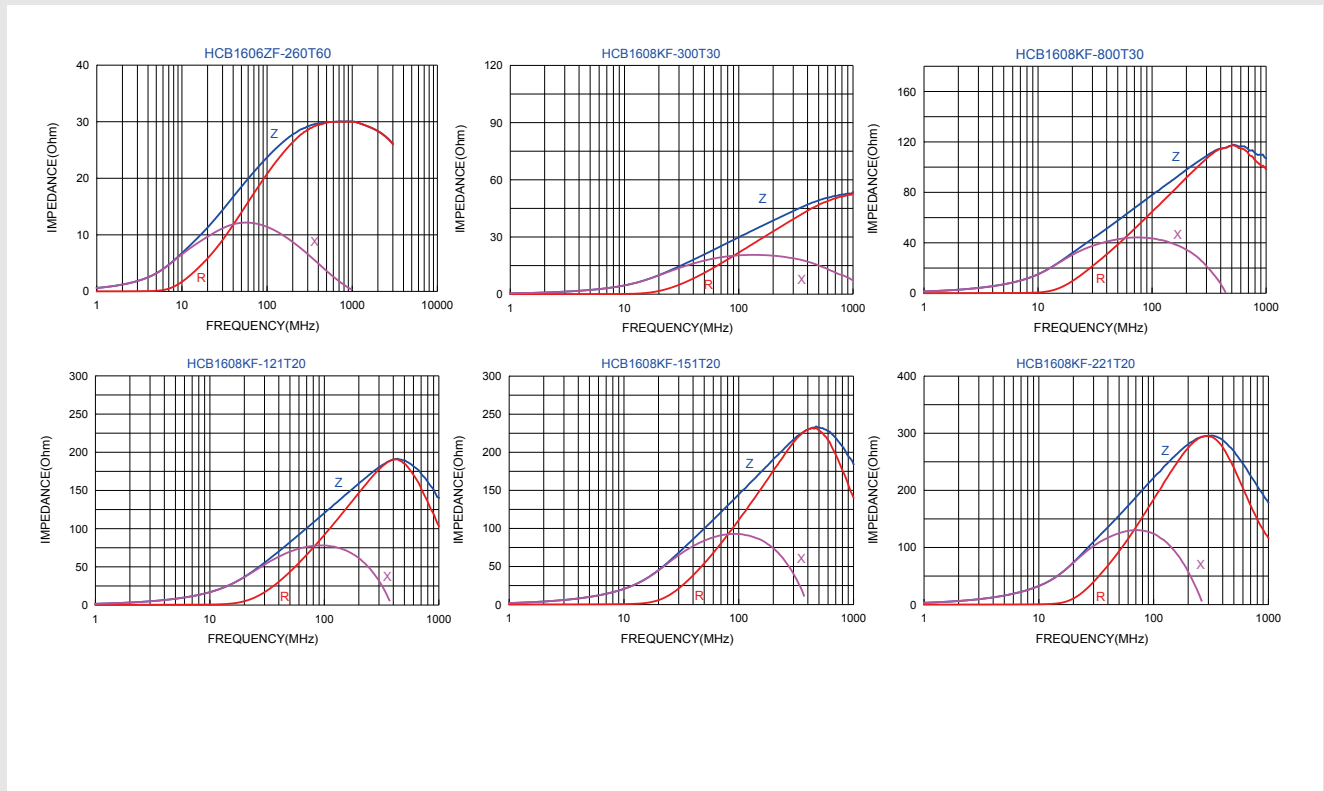

Remark

All the data listed in this catalogue are for reference only, TAI-TECH reserves the right to alter or revise the specifications without prior notification. For the latest specification, please visit our website: www.taitech.com.hk



High Current Ferrite Chip Beads

HCB 1608 Series 0603 inch






Pb-free



Halogen-free

Impedance-Frequency Characteristics (Typical)

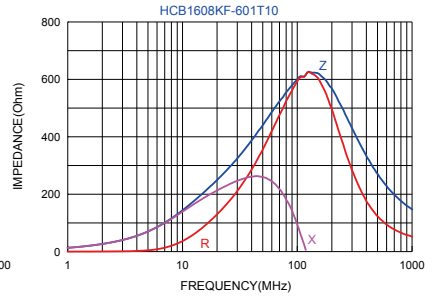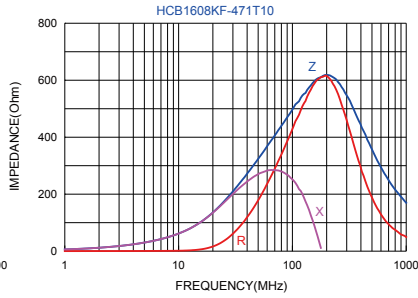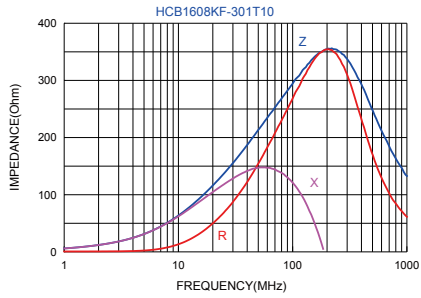

Remark

All the data listed in this catalogue are for reference only, TAI-TECH reserves the right to alter or revise the specifications without prior notification. For the latest specification, please visit our website: www.taitech.com.hk