



# High Current Ferrite Chip Beads


## HCB 3216 Series 1206 inch



### Dimensions

**Chip Size** Units: mm


A	3.20±0.20
B	1.60±0.20
C	1.10±0.20
D	0.50±0.30



### Specifications

Part Number	Impedance (Ω)	Test Frequency (MHz)	DC Resistance (Ω) max.	Rated Current (mA) max.
HCB3216KF-300T30	30 ± 25%	100	0.04	3000
HCB3216KF-500T30	50 ± 25%	100	0.04	3000
HCB3216KF-800T30	80 ± 25%	100	0.04	3000
HCB3216KF-121T20	120 ± 25%	100	0.10	2000
HCB3216KF-151T20	150 ± 25%	100	0.10	2000
HCB3216KF-301T10	300 ± 25%	100	0.20	1000
HCB3216KF-471T10	470 ± 25%	100	0.20	1000
HCB3216KF-501T30	500 ± 25%	100	0.04	3000
HCB3216KF-601T20	600 ± 25%	100	0.10	2000

### Impedance-Frequency Characteristics (Typical)



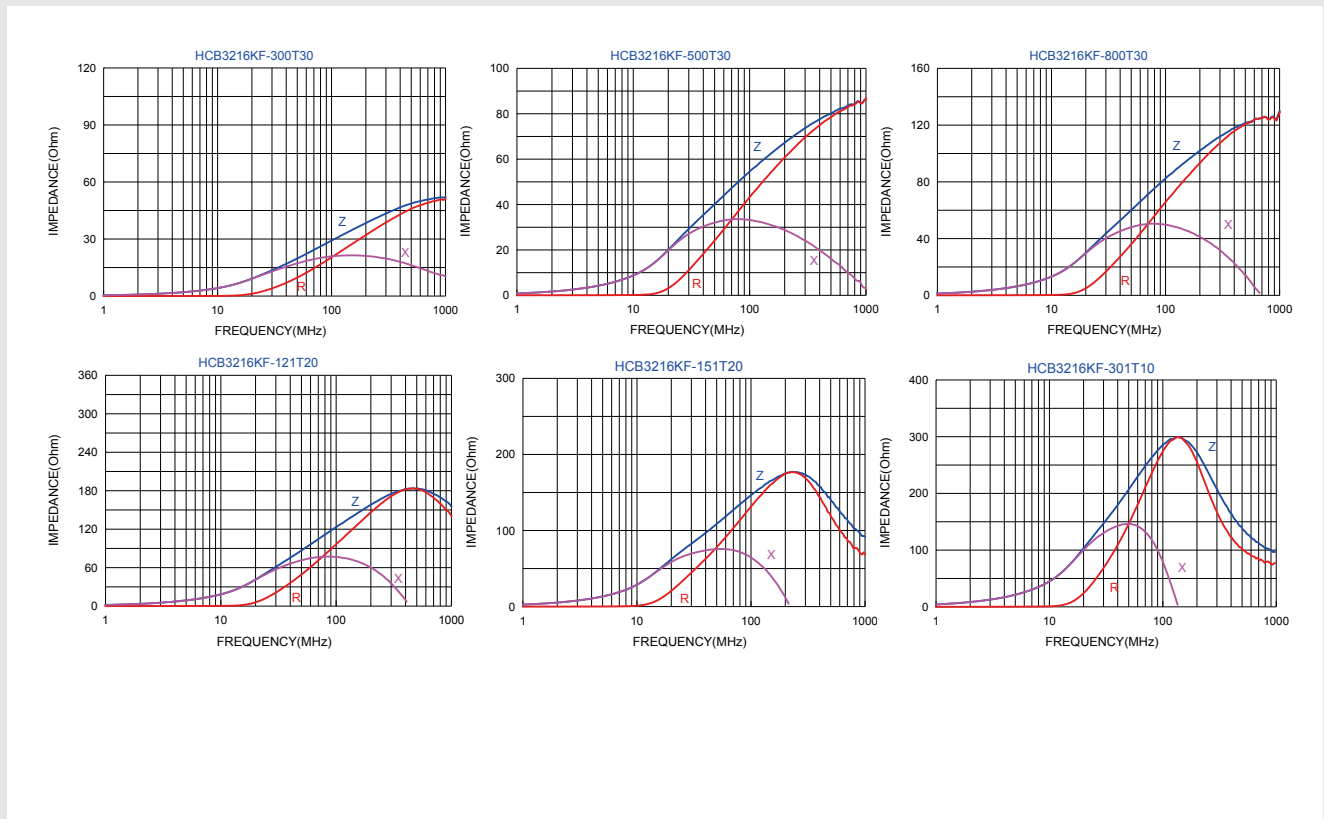


**Remark**

All the data listed in this catalogue are for reference only, TAI-TECH reserves the right to alter or revise the specifications without prior notification. For the latest specification, please visit our website: [www.taitech.com.hk](http://www.taitech.com.hk)



### Impedance-Frequency Characteristics (Typical)

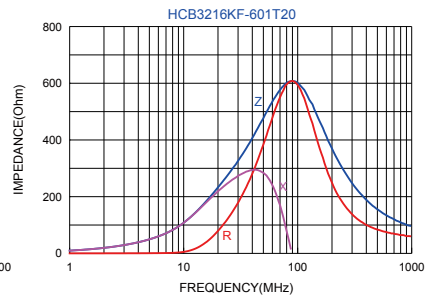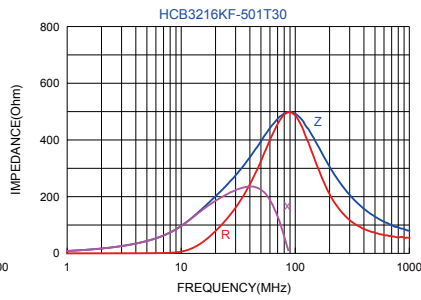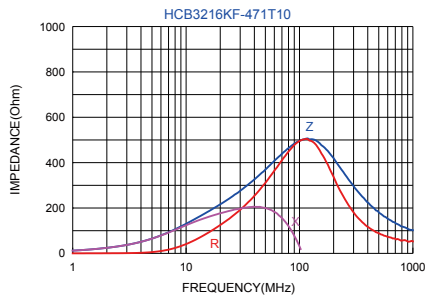

Remark

All the data listed in this catalogue are for reference only, TAI-TECH reserves the right to alter or revise the specifications without prior notification. For the latest specification, please visit our website: [www.taitech.com.hk](http://www.taitech.com.hk)