



Ferrite Chip Bead Array

FCA 3216 Series

1206 inch





Pb-free

Halogen-free

Dimensions

Chip Size Units: mm


A	3.20±0.20
B	1.60±0.20
C	0.90±0.20
D1	0.40±0.15
D2	0.30±0.10
P	0.80±0.10



Specifications

Part Number	Impedance (Ω)	Test Frequency (MHz)	DC Resistance (Ω) max.	Rated Current (mA) max.
FCA3216KF4-300T05	30 ± 25%	100	0.20	500
FCA3216KF4-600T04	60 ± 25%	100	0.25	400
FCA3216KF4-121T03	120 ± 25%	100	0.30	350
FCA3216KF4-301T02	300 ± 25%	100	0.40	250
FCA3216KF4-601T02	600 ± 25%	100	0.50	200
FCA3216KF4-102T01	1000 ± 25%	100	0.75	150
FCA3216MF4-300T04	30 ± 25%	100	0.25	400
FCA3216MF4-600T03	60 ± 25%	100	0.30	300
FCA3216MF4-121T02	120 ± 25%	100	0.40	250
FCA3216MF4-301T02	300 ± 25%	100	0.50	200

Impedance-Frequency Characteristics (Typical)




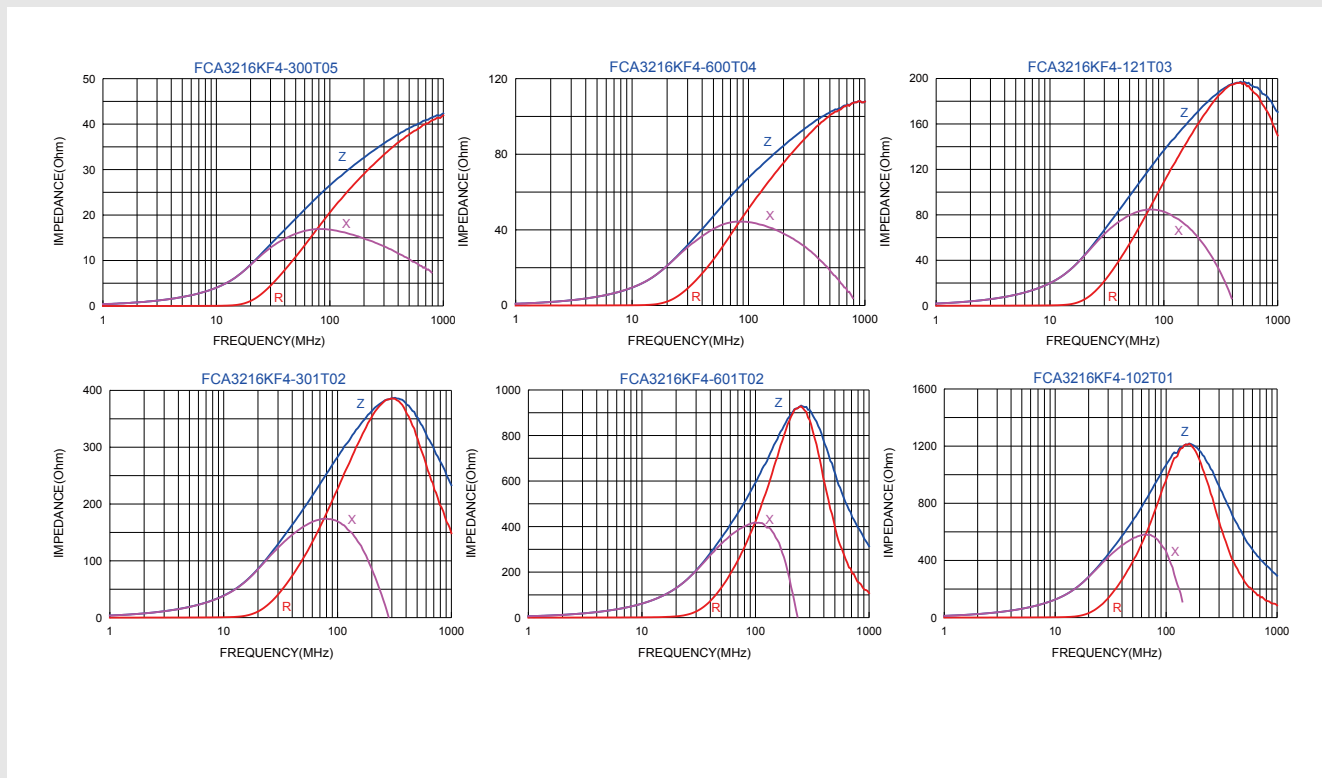


Remark

All the data listed in this catalogue are for reference only, TAI-TECH reserves the right to alter or revise the specifications without prior notification. For the latest specification, please visit our website: www.taitech.com.hk



Impedance-Frequency Characteristics (Typical)

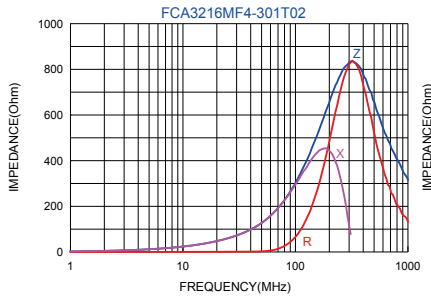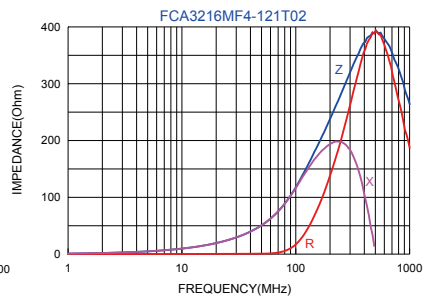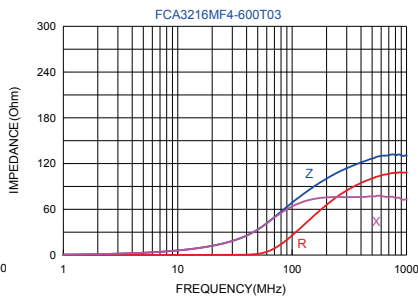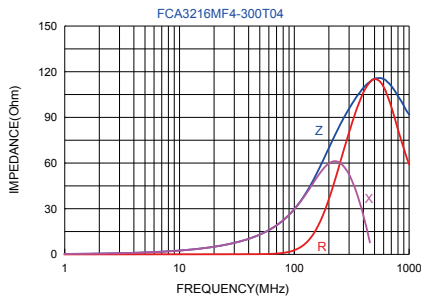

Remark

All the data listed in this catalogue are for reference only, TAI-TECH reserves the right to alter or revise the specifications without prior notification. For the latest specification, please visit our website: www.taitech.com.hk